

4MP Full HD WDR Network IR Bullet Camera

Key Features

- 1/3" progressive scan CMOS
- Support H.264 & MJPEG dual codec
- Max 20fps@4MP(2688×1520),25/30fps@3M(2304×1296)
- Smart Detection supported
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(PVMS) & Smart Phone(PMOB)
- 2.7mm ~12mm motorized lens
- 2/1 Alarm in/out, 1/1 audio in/out
- Max. IR LEDs Length 50m
- Micro SD memory, IP67, PoE




Technical Specifications

Model		PI-SPW401L	
Camera			
Image Sensor		1/3" progressive scan CMOS	
Effective Pixels		2688(H) x 1520(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual, 1/3(4)~1/100000s	
Min. Illumination		0.01Lux/F1.4(Color),0Lux/F1.4(IR on)	
S/N Ratio		More than 50dB	
Video Output		1 port	
Camera Features			
Max. IR LEDs Length		50m	
Day/Night		Auto(ICR) / Color / B/W	
Backlight Compensation		BLC / HLC /WDR(120dB)	
White Balance		Auto/Sunny/Night/Outdoor/Customized	
Gain Control		Auto/Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		2.7mm~12mm	
Max Aperture		F1.4	
Focus Control		Motorized	
Angle of View		H: 100°~33°	
Lens Type		Motorized/ Auto Iris(DC)	
Mount Type		Board-in Type	
Video			
Compression		H.264/H.264H/H.264B/MJPEG	
Resolution		4M(2688x1520)/4M(2560x1440)/3M(2304x1296)/720P(1280×720)/D1(704×576/704×480)/CIF(352×288/352×240)	
Frame Rate	Main Stream	4MP(1~20fps)/3MP(1 ~ 25/30fps)	
	Sub Stream	D1(1 ~ 25/30fps)	
	Third Stream	720P(1~ 20fps)	
Bit Rate		H.264: 32K ~ 10Mbps	
Corridor Mode		Support	
Audio			
Compression		G.711a/ G.711u/AAC	
Interface		1/1 channel In/Out	
Smart Function			
Smart detection	Tripwire		
	Intrusion		
	Abandoned/Missing		
	Scene Change		
	Audio detect		
	Face detect		
Network			
Ethernet		RJ-45 (10/100Base-T)	
Wi-Fi		N/A	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour,802.1x	
ONVIF		ONVIFPSIA,CGI	
Max. User Access		20 users	
Smart Phone		iPhone, iPad, Android	
Auxiliary Interface			
Memory Slot		Micro SD, Max 128GB	
RS485		N/A	
Alarm		2/1 channel In/Out	
PIR Sensor Range		N/A	

General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	<11.5W (with IR on)
Working Environment	-40°C~+60°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	N/A
Dimensions	272.9 mm x 94.9mm x 94.9mm
Weight	1.1kg

Dimensions (mm)

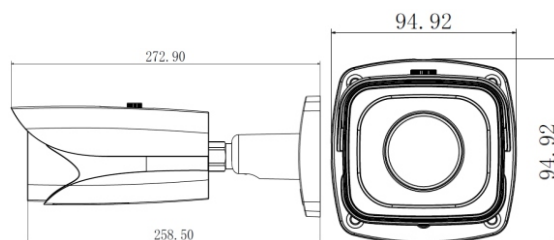

Accessories (optional)

